
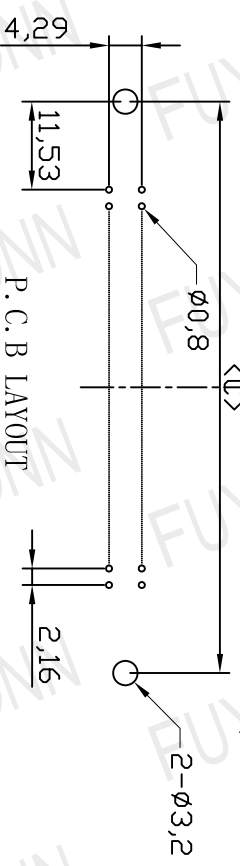
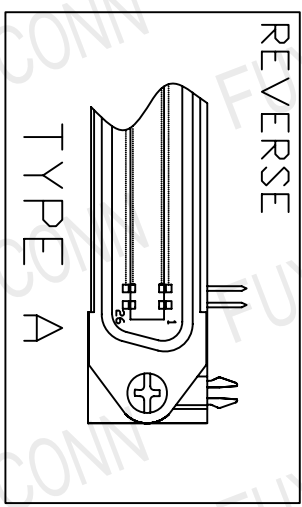



REV	DATE	DESCRIPTION
B	2011-9-8	增加反向图。

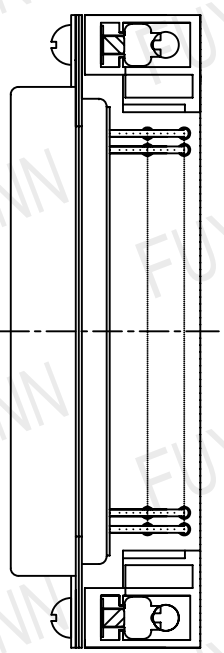

Positions	A	B	C	D
14	12.96	25.2	36.0	44.0
24	23.76	36.0	46.8	54.8
36	36.72	48.9	59.7	67.7
50	51.84	64.1	74.9	82.8

CONTACT LENGTH

Material & finish
SHELL:
steel Zinc plated, Tin plated
or Nickel plated steel
PIN CONTACT:
Phosphor bronze or brass
Gold Plated
INSULATOR:
PBT & Glass-fibre reinforced
UL-94-V0
CURRENT RATING:5Amp
DIELECTRIC STRENGTH:
1000V for one minute
INSULATOR RESISTANCE:
1000MΩ MIN.(at 500V DC)
CONTACT RESISTANCE:25mΩ Max. mated
TEMPERATURE:
-55°C to +105°C

57RR * S * A 0 058

FILE NO:001-1000
CONTACT LENGTH(MM):
A:2.6 B:2.7 C:2.8
D:3.0 E:3.2 F:4.75 O:N/A

SHELL:
A: NICKEL PLATED

CONTACT PLATING:
A:GOLD FLASH B:3U "C:5U"
D:10U" E:15U" F:30U"

INSULATOR COLOR:
B:BLACK K:BRACK

CONTACT TYPE:
P:PLUG
S:SOCKET

NO. OF CONTACTS:
14 24 36 50



UNIT : mm

FUYCONN
东莞市复禹电子有限公司
DONG GUAN FUYCONN ELECTRONICS CO., LTD

MODEL NAME:
57-90度母DIP平孔型圆头
4*7锁合3.9Z字片

SELECT	1	2	3	EXTRA
DIM TOL	0.000	0.05	0.05	0.10
	0.00	0.10	0.15	0.20
	0.0	0.15	0.25	0.30
ANGLE	0.25	0.30	0.40	
	1.0°	3.0°	5.0°	

PART NO. 57RR*S*A*058
APPROVED BY:
CHECKED BY:
DRAW BY: 周胤璇

FILE NO. FUY57058
SCALE:
DATE : 2009-5-30